

Spark-ignited generator set 20 – 30 kW standby EPA Emissions



> Specification sheet

Our energy working for you.™



Description

Cummins Power Generation commercial generator sets are fully integrated power generation systems providing optimum performance, reliability and versatility for stationary standby and prime power applications. Codes or standards compliance may not be available with all model configurations – consult factory for availability.



This generator set is designed in facilities certified to ISO 9001 and manufactured in facilities certified to ISO 9001 or ISO 9002.



The Prototype Test Support (PTS) program verifies the performance integrity of the generator set design. Cummins Power Generation products bearing the PTS symbol meet the prototype test requirements of NFPA 110 for Level 1 systems.



All low voltage models are CSA certified to product class 4215-01.



The generator set is available Listed to UL 2200, Stationary Engine Generator Assemblies.

U.S. EPA Engine certified to U.S. EPA SI Stationary Emission Regulation 40 CFR, Part 60.

Features

GM heavy-duty gas engine - Rugged 4-cycle, industrial spark-ignited delivers reliable power. The electronic air/fuel ratio control provides optimum engine performance and fast response to load changes.

Alternator - Several alternator sizes offer selectable motor starting capability with low reactance 2/3 pitch windings, low waveform distortion with non-linear loads and fault clearing short-circuit capability.

Control system - The PowerCommand® electronic control is standard equipment and provides total genset system integration including automatic remote starting/stopping, precise frequency and voltage regulation, alarm and status message display, AmpSentry™ protection, output metering, auto-shutdown at fault detection and NFPA 110 Level 1 compliance.

Cooling system - Standard cooling package provides reliable running at up to 53 °C (127 °F) ambient temperature at the rated power level.

Enclosures - Optional weather protective and sound attenuated enclosures are available.

NFPA - The genset accepts full rated load in a single step in accordance with NFPA 110 for Level 1 systems.

Warranty and service - Backed by a comprehensive warranty and worldwide distributor network.

Model	Natural gas				Propane				Data sheets	
	Standby rating		Prime rating		Standby rating		Prime rating		60 Hz	50 Hz
	60 Hz kW (kVA)	50 Hz kW (kVA)	60 Hz kW (kVA)	50 Hz kW (kVA)	60 Hz kW (kVA)	50 Hz kW (kVA)	60 Hz kW (kVA)	50 Hz kW (kVA)		
GGMA	20.0 (25.0)				20.0 (25.0)				D-3390	
GGMB	25.0 (31.0)				25.0 (31.0)				D-3391	
GGMC	29.0 (36.0)				30.0 (38.0)				D-3392	

Generator set specifications

Governor regulation class	ISO 8528 Part 1 Class G3
Voltage regulation, no load to full load	± 1.0%
Random voltage variation	± 1.0%
Frequency regulation	Isochronous
Random frequency variation	± 0.5% @ 60 Hz
Radio frequency emissions compliance	Meets requirements of most industrial and commercial applications

Engine specifications

Design	Naturally aspirated
Bore	101.6 mm (4.0 in)
Stroke	91.4 mm (3.6 in)
Displacement	3.0 litres (181 in ³)
Cylinder block	Cast iron, in-line 4 cylinder
Battery capacity	420 amps minimum at ambient temperature of 0 °C (32 °F)
Battery charging alternator	60 amps
Starting voltage	12 volt, negative ground
Lube oil filter type(s)	Spin-on full flow
Standard cooling system	53 °C (127 °F) ambient cooling system

Alternator specifications

Design	Brushless, 4 pole, drip proof, revolving field
Stator	2/3 pitch
Rotor	Direct coupled, flexible disc
Insulation system	Class H per NEMA MG1-1.65
Standard temperature rise	125 °C (257 °F) at standby
Exciter type	Torque match (shunt)
Phase rotation	A (U), B (V), C (W)
Alternator cooling	Direct drive centrifugal blower
AC waveform total harmonic distortion	< 5% no load to full linear load, < 3% for any single harmonic
Telephone influence factor (TIF)	< 40 per NEMA MG1-22.43
Telephone harmonic factor (THF)	< 3

Available voltages

Reconnectable	Non-Reconnectable	
3-phase	1-phase	3-phase
<ul style="list-style-type: none"> · 120/208 · 120/240 delta · 127/220 · 139/240 · 240/416 · 254/440 · 277/480 	<ul style="list-style-type: none"> · 120/240 	<ul style="list-style-type: none"> · 220/380 · 347/600

Note: Consult factory for other voltages.

Generator set options and accessories

Engine <ul style="list-style-type: none"> .. 120/240 V 1500 W coolant heaters .. Heavy duty air cleaner Fuel system <ul style="list-style-type: none"> .. Natural gas .. Propane vapor withdrawal .. Natural gas/propane vapor with auto changeover 	Alternator <ul style="list-style-type: none"> .. 12 lead, broad range (full single phase output) .. Single phase (4 lead) .. 105 °C (221 °F) rise alternator (prime) .. 125 °C (257 °F) rise alternator (standby) 	Generator set <ul style="list-style-type: none"> .. Battery .. Battery charger .. Coolant drain extension .. Oil drain extension .. Duct adapter .. Enclosure, aluminum weather protective, with critical silencer 	<ul style="list-style-type: none"> .. Export box packaging .. Main line circuit breakers .. UL 2200 Listed .. 2 year prime power warranty .. 2 year standby warranty .. 5 year basic power warranty .. 5 year comprehensive warranty .. Flex fuel lines
--	---	--	---

Note: Some options may not be available on all models - consult factory for availability.

Our energy working for you.™

www.cumminspower.com

©2011 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, InPower and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product or service names may be trademarks or service marks of others. Specifications are subject to change without notice.
S-1591c (6/11)



Control system

PowerCommand control

- The PowerCommand Control is an integrated generator set control system providing isochronous governing, voltage regulation, engine protection, generator protection and operator interface functions.
- Control provides battery monitoring and testing features, and smart starting control system.
- InPower™ PC-based service tool available for detailed diagnostics.
- Standard PCCNet RS485 network interface to devices such as remote annunciator for NFPA110 applications.
- Control boards are potted for environmental protection.
- Suitable for operation in ambient temperatures from -40 °C to +70 °C (-40 °F to +158 °F), and altitudes to 5000 m (13,000 ft).
- Prototype tested; UL, CSA and CE compliant.

AC protection

- Over current warning and shutdown*
- Over and under voltage shutdown
- Over and under frequency shutdown
- Over excitation
- Field overload

Engine protection

- Overspeed shutdown
- Low oil pressure warning and shutdown*
- High coolant temperature warning and shutdown*
- Low coolant level warning or shutdown*
- Low coolant temperature warning*
- High, low and weak battery voltage warning*
- Fail to start (overcrank) shutdown
- Fail to crank shutdown
- Redundant start disconnect
- Cranking lockout
- Sensor failure indication
- Low fuel pressure warning*

Operator/display panel (optional)

- Manual off switch
- Alpha-numeric display with pushbutton access, for viewing engine and alternator data and providing setup, controls and adjustments (English or international symbols)
- LED lamps indicating genset running, not in auto, common warning, common shutdown, manual run mode, remote start
- Suitable for operation in ambient temperatures from -20 °C to +70 °C (-4 °F to 158 °F).

Alternator data

- Line-to-line and line-to-neutral AC volts*
- Three phase AC current*
- Frequency*
- Total kVA*

Engine data

- DC voltage*
- Lube oil pressure*
- Coolant temperature*

Other data

- Genset model data
- Start attempts, starts, running hours
- Fault history
- RS485 Modbus® interface
- Data logging and fault simulation (requires InPower Service Tool)

Digital governing (optional)

- Integrated digital electronic isochronous governor
- Temperature dynamic governing

Digital voltage regulation

- Integrated digital electronic voltage regulator
- Two phase line-to-line sensing
- Configurable torque matching

Control functions

- Time delay start and cooldown
- Cycle cranking
- (2) configurable inputs
- (2) configurable outputs
- Remote emergency stop

Options

- Local operator/display panel
- Digital electronic governing
- Auxiliary output relays (2)
- 120/240 V, 100 W anti-condensation heater
- Emergency stop switch
- Remote annunciator with (3) configurable inputs and (4) configurable outputs
- PowerCommand for Windows remote monitoring software (direct connect)
- Auxiliary, configurable signal inputs (8) and configurable relay outputs (8)



Standard operator panel



Optional operator/display panel

* Optional operator/display panel required to display warnings and sensor data, and for NFPA 110 and CSA 282 applications.

Our energy working for you.™

www.cumminspower.com

©2011 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, InPower and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product or service names may be trademarks or service marks of others. Specifications are subject to change without notice.
S-1591c (6/11)



Ratings definitions

Emergency standby power (ESP):

Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

Limited-time running power (LTP):



Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.

Prime power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

Base load (continuous) power (COP):

Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

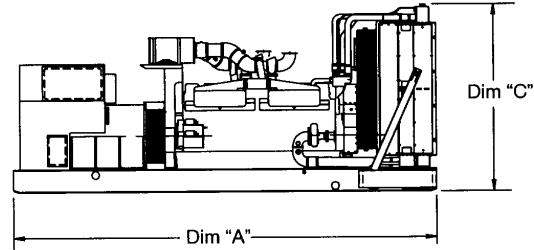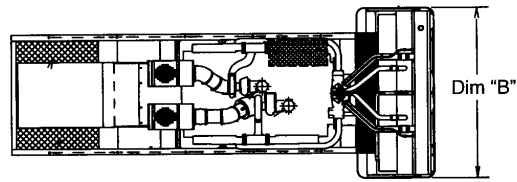

This outline drawing is for reference only. See respective model data sheet for specific model outline drawing number.

Do not use for installation design

Model	Dim "A" mm (in.)	Dim "B" mm (in.)	Dim "C" mm (in.)	Set Weight* dry kg (lbs)	Set Weight* wet kg (lbs)
GGMA	1626 (64.0)	762.0 (30.0)	889.0 (35.0)	418 (922)	434 (956)
GGMB	1626 (64.0)	762.0 (30.0)	889.0 (35.0)	440 (970)	455 (1004)
GGMC	1626 (64.0)	762.0 (30.0)	889.0 (35.0)	507 (1117)	522 (1151)

* Weights represent a set with standard features. See outline drawings for weights of other configurations.

Cummins Power Generation
1400 73rd Avenue N.E.
Minneapolis, MN 55432 USA
Telephone: 763 574 5000
Fax: 763 574 5298

Warning: Back feed to a utility system can cause electrocution and/or property damage. Do not connect to any building's electrical system except through an approved device or after building main switch is open.

Our energy working for you.™

www.cumminspower.com

©2011 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, InPower and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product or service names may be trademarks or service marks of others. Specifications are subject to change without notice.
S-1591c (6/11)

