


**New From**  
**RELIANCE**  
**CONTROLS**


**Q-Series PRO/TRAN®**

The Q-Series Models have all the features of the Pro/Tran® line of manual transfer switches for portable generators plus they have 1" interchangeable circuit breakers and can handle a 30A double pole circuit. They are pre-wired and have a wiring compartment for the hard-wire connection to a remote power inlet. Rated up to 50A, they can handle generators up to 12,500 running watts. Easy to install and easy to operate, the Pro/Tran® line has become the choice for the professional installer.

**Model Q510C**

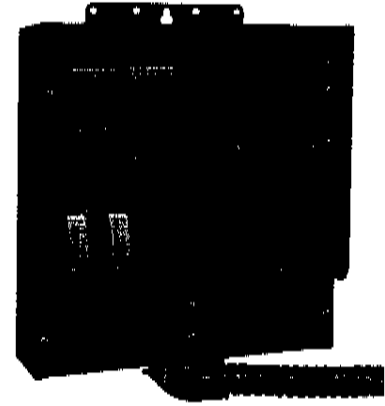

**Model Q506C**

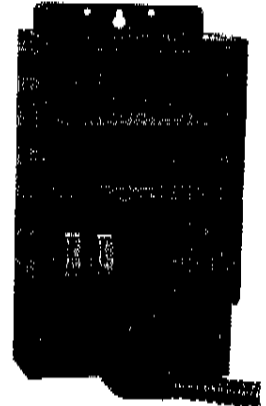

**Specifications:**

Catalog Number-Indoor Surface	Max. Utility Input Per Circuit	Gen. Power Inlet Included/ Rating/ Config.	Watt Meters Included	Max. Circuits -Single Pole	Max. Circuits -Double Pole	Max. Gen. Input Per Circuit	Max. Gen. Input - Watts
<b>Q306A</b>	(2) 30A (4) 20A	Yes/30A@250V /L14-30	Yes	6	3	(1) 2P-30, (1) 2P-20, and (2) 1P-15	7,500
<b>Q306B</b>	(2) 30A (4) 20A	Yes/30A@250V /L14-30	No	6	3	(1) 2P-30, (1) 2P-20, and (2) 1P-15	7,500
<b>Q306C</b>	(2) 30A (4) 20A	No	Yes	6	3	(1) 2P-30, (1) 2P-20, and (2) 1P-15	7,500
<b>Q306D</b>	(2) 30A (4) 20A	No	No	6	3	(1) 2P-30, (1) 2P-20, and (2) 1P-15	7,500
<b>Q310A</b>	(2) 30A (8) 20A	Yes/30A@250V /L14-30	Yes	10	5	(1) 2P-30, (1) 2P-20, and (6) 1P-15	7,500
<b>Q310B</b>	(2) 30A (8) 20A	Yes/30A@250V /L14-30	No	10	5	(1) 2P-30, (1) 2P-20, and (6) 1P-15	7,500
<b>Q310C</b>	(2) 30A (8) 20A	No	Yes	10	5	(1) 2P-30, (1) 2P-20, and (6) 1P-15	7,500
<b>Q310D</b>	(2) 30A (8) 20A	No	No	10	5	(1) 2P-30, (1) 2P-20, and (6) 1P-15	7,500
<b>Q510A</b>	(2) 30A (8) 20A	Yes/50A@250V CS6365	Yes	10	5	(1) 2P-30, (1) 2P-20, and (6) 1P-15	12,500
<b>Q510B</b>	(2) 30A (8) 20A	Yes/50A@250V CS6365	No	10	5	(1) 2P-30, (1) 2P-20, and (6) 1P-15	12,500
<b>Q510C</b>	(2) 30A (8) 20A	No	Yes	10	5	(1) 2P-30, (1) 2P-20, and (6) 1P-15	12,500
<b>Q510D</b>	(2) 30A (8) 20A	No	No	10	5	(1) 2P-30, (1) 2P-20, and (6) 1P-15	12,500